


BS6724 3 Core Mains Cable 3.3kV - XLPE,SWA, LSZH - 16mm² to 300mm²

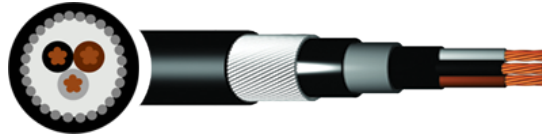

Description

Cleveland Cable Company stocks a large range of 3.3kV (3300V) 3 core Low Smoke Zero Halogen (LSZH) mains cables, available in sizes 16mm to 300mm and manufactured to British Standard BS6724. The 3 core mains cable is medium voltage power cable designed for installation indoors. This cable can be used in public places where increased safety is required due to Low Smoke Zero Halogen (LSZH) outer sheath.

Key Features



Voltage Rating
1.9kV-3.3kV



Minimum Bending Radius
Fixed: 12 x overall diameter



Flame Retardancy
BS EN/IEC 60332-1-2
BS EN/IEC 60332-3-24



Temperature Limits
Temperature Range: -15°C to + 90°C
Maximum short-circuit temperature: 250°C

Core Colours

3 core - Brown Black Grey

Standards

- BS6724
- IEC/EN 61034-1/2,
- BS EN/IEC 60332-1-2
- BS EN/IEC 60228
- BS EN/IEC 60754-1

Construction

- **Conductor:** Class 2 stranded copper conductor
- **Insulation:** Cross Linked polyethylene (XLPE)
- **Bedding:** LSZH (Low smoke Zero Halogen)
- **Armour:** Steel Wire Armour (SWA)
- **Outer Sheath:** Low Smoke Zero Halogen (LSZH)
- **Sheath Colour:** Black

QA Lab

Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

ecovadis

BS6724 3 Core Mains Cable 3.3kV - XLPE,SWA, LSZH - 16mm² to 300mm² - Dimensions

Reference	Conductor Size (mm ²)	No Of Cores	Stranding(mm)	Overall Diameter(mm)	Weight(Kg/Km)	Nylon Cleat Size	Gland Size
LSF3X16/3	16	3	7/1.70	29.5	1600	1.2	32
LSF3X25/3	25	3	7/2.14	32.3	2060	1.4	32
LSF3X35/3	35	3	7/2.52	35	2330	1.4	40
LSF3X50/3	50	3	19/1.78	34.9	3040	1.4	40
LSF3X70/3	70	3	19/2.14	38	3800	1.6	40
LSF3X95/3	95	3	19/2.52	41.4	4730	1.8	50S
LSF3X120/3	120	3	37/2.03	45.6	6070	1.8	50S
LSF3X150/3	150	3	37/2.25	48.3	7010	2	50
LSF3X185/3	185	3	37/2.52	51.6	8270	TC9	50
LSF3X240/3	240	3	61/2.25	56.5	10310	TC9	63S
LSF3X300/3	300	3	61/2.52	60.7	12300	TC10	63

TABLE 4E4A

CURRENT-CARRYING CAPACITY (amps)

Ambient temperature: 30°C
 Ground ambient temperature: 20°C
 Conductor operating temperature: 90°C

Conductor cross-sectional area	Reference Method C (clipped direct)		Reference Method E (in free air or on a perforated cable tray etc, horizontal or vertical)		Reference Method D (direct in ground or in ducting in ground, in or around buildings)	
	1 two-core cable single-phase AC or DC	1 three- or 1 four- core cable, three- phase AC	1 two-core cable single-phase AC or DC	1 three- or 1 four- core cable, three- phase AC	1 two-core cable single-phase AC or DC	1 three- or 1 four- core cable, three- phase AC
mm ²	(A)	(A)	(A)	(A)	(A)	(A)
1.5	27	23	29	25	25	21
2.5	36	31	39	33	33	28
4	49	42	52	44	43	36
6	62	53	66	56	53	44
10	85	73	90	78	71	58
16	110	94	115	99	91	75
25	146	124	152	131	116	96
35	180	154	188	162	139	115
50	219	187	228	197	164	135
70	279	238	291	251	203	167
95	338	289	354	304	239	197
120	392	335	410	353	271	223
150	451	386	472	406	306	251
185	515	441	539	463	343	281
240	607	520	636	546	395	324
300	698	599	732	628	446	365
400	787	673	847	728		

1. Where it is intended to connect the cables in this table to equipment or accessories designed to operate at a temperature lower than the maximum operating temperature of the cable, the cables should be rated at the maximum operating temperature of the equipment or accessory (see Regulation 512.1.5).
 2. Where it is intended to group a cable in this table with other cables, the cable should be rated at the lowest of the maximum operating temperatures of any of the cables in the group (see Regulation 512.1.5).

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.