


FG16(O)R16 Single Core Electric Vehicle DC Cable 4mm² to 400mm²

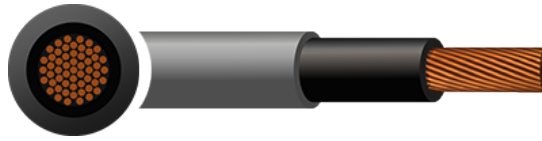

Description

This is a flexible single core PVC Cable which is manufactured to FG16(O)R16. Its enhanced DC Power rating makes it ideal for high-powered charging stations. For use internally and externally. Suitable to be used in free air, pipes and ducts in conduit, on masonry and inside metal structures.

Key Features



Voltage Rating

600/1000V AC
Maximum 1800V DC



Minimum Bending Radius

6 x overall diameter



Flame Retardancy

BS EN/IEC 60332-1-2



Temperature Limits

Temperature Range: -15°C to +90°C
Maximum Short Circuit Temperature: Up to 240 mm²: +250°C
Maximum Short Circuit Temperature Above 240 mm²: +220°C

Standards

- BS EN/IEC 60502-1
- CEI 20-13
- BS EN 50575

Construction

- **Conductor:** Class 5 flexible stranded copper conductor
- **Insulation:** G16 Hard Grade Ethylene Propylene Rubber (HEPR)
- **Outer Sheath:** R16 Poly Vinyl Chloride (PVC)
- **Sheath Colour:** Grey

QA Lab

Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

ecovadis

FG16(O)R16 Single Core Electric Vehicle DC Cable 4mm² to 400mm² - Dimensions

Reference	Conductor Size (mm ²)	No Of Cores	Stranding(mm)	Nominal Diameter	Max Overall Dia	Weight(Kg/Km)
CONNECTEVDC1X4	4	1	50/0.25	2.6	9.3	82
CONNECTEVDC1X6	6	1	84/0.30	3.4	10	101
CONNECTEVDC1X10	10	1	80/0.40	4.4	11	152
CONNECTEVDC1X16	16	1	126/0.40	5.7	11.8	211
CONNECTEVDC1X25	25	1	196/0.40	6.9	13.5	301
CONNECTEVDC1X35	35	1	276/0.40	8.1	14.8	396
CONNECTEVDC1X50	50	1	396/0.40	9.8	16.6	556
CONNECTEVDC1X70	70	1	360/0.50	11.5	17.6	761
CONNECTEVDC1X95	95	1	475/0.50	13.3	20.5	991
CONNECTEVDC1X120	120	1	608/0.50	15.1	22.6	1219
CONNECTEVDC1X150	150	1	756/0.50	16.8	25	1517
CONNECTEVDC1X185	185	1	925/0.50	18.5	27.5	1821
CONNECTEVDC1X240	240	1	1221/0.50	21.4	30.5	2366
CONNECTEVDC1X300	300	1	1525/0.50	24	33.5	2947
CONNECTEVDC1X400	400	1	2013/0.50	27.5	38	3870

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.