


BS6346/87 Armoured Traffic Signal Cable - 1mm² to 1.5mm²

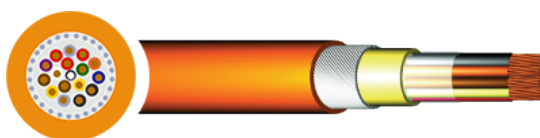

Description

Armoured PVC traffic signal cable, used to connect traffic signal equipment or in other applications that require high core configurations with tough mechanical robustness.

Key Features



Voltage Rating
600/1000 Volts



Minimum Bending Radius
10 x Overall Diameter



Flame Retardancy
BS EN/IEC 60332-1-2



Temperature Limits
Temperature Range: -15°C to +70°C

Core Colours

4 Core:

Red

Blue

Yellow

Green

8 Core:

Brown

Yellow

Green

Blue

Red

White

Blue

Black

Orange

12 Core:

Brown

Yellow

Green

Blue

Red

White

Blue

Black

Orange

Red

White

Grey

Red

Blue

Violet

16 Core:

Brown

Yellow

Green

Blue

Red

White

Blue

Black

Orange

Red

White

Grey

Red

Blue

Violet

Brown

Red

Yellow

Red

Grey

Red

Black

Red

20 Core:

Brown

Yellow

Green

Blue

Red

White

Blue

Black

Orange

Red

White

Grey

Red

Blue

Violet

Brown

Red

Yellow

Red

Grey

Red

Black

Red

Violet

Red

Orange

Red

Green

Red

Blue

White

Standards

- BS6346/87
- BS EN/IEC 60332-1-2
- BS EN/IEC 60228

Construction

- **Conductor:** Class 1 solid copper
- **Insulation:** Polyvinyl Chloride (PVC)
- **Bedding:** Polyvinyl Chloride (PVC)
- **Armour:** Steel Wire Armour (SWA)
- **Outer Sheath:** Polyvinyl Chloride (PVC)
- **Sheath Colour:** Orange

QA Lab

Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

ecovadis

BS6346/87 Armoured Traffic Signal Cable - 1mm² to 1.5mm² - Dimensions

Reference	Conductor Size (mm2)	No Of Cores	Stranding(mm)	Overall Diameter(mm)	Weight(Kg/Km)	Gland Size
TRAF4X1	1	4	1/1.13	13	325	20S
TRAF8X1ESWA	1	8	1/1.13	16.3	533	20
STCTRAF8X1	1	8	1/1.13	3	413	20S
STCTRAF12X1E	1	12	1/1.13	15.5	785	25
STCTRAF12X1R250	1	12	1/1.13	15.6	567	20
STCTRAF16X1	1	16	1/1.13	17.9	774	20
STCTRAF20X1R250	1	20	1/1.13	19.9	905	25
TRAF4X1/5	1.5	4	1/1.38	12.5	363	20S
STCTRAF8X1/5	1.5	8	1/1.38	15.8	534	20
STCTRAF12X1/5R250	1.5	12	1/1.38	18.5	704	20
STCTRAF16X1/5R250	1.5	16	1/1.38	20	836	20
STCTRAF20X1/5R250	1.5	20	1/1.38	21.5	1040	25
STCTRAF27X1/5SWA R250	1.5	27	1/1.38	23.75	1280	25

TRAFFIC CABLE – ELECTRICAL PROPERTIES

CABLE TYPE	NOMINAL CROSS SECTIONAL AREA mm ²	NUMBER OF CORES	MAXIMUM CONDUCTOR RESISTANCE AT 20°C Ω/KM	CURRENT CARRYING CAPACITY		VOLTAGE DROP MV/A/M
				IN AIR (AMPS)	DIRECT BURIAL (AMPS)	
BS6346 PVC TRAFFIC CABLE	1	8	18.10	12.00	10.50	38
BS6346 PVC TRAFFIC CABLE	1	12	18.10	10.00	8.70	38
BS6346 PVC TRAFFIC CABLE	1	16	18.10	9.00	8.00	38
BS6346 PVC TRAFFIC CABLE	1	20	18.10	8.00	7.10	38
BS6346 PVC TRAFFIC CABLE	1.5	8	12.10	15.00	13.50	25
BS6346 PVC TRAFFIC CABLE	1.5	12	12.10	13.00	11.70	25
BS6346 PVC TRAFFIC CABLE	1.5	16	12.10	11.00	10.00	25
BS6346 PVC TRAFFIC CABLE	1.5	20	12.10	10.00	9.10	25
LOOP FEEDER CABLE	1.5	2	12.10	10.00	9.00	38
LOOP FEEDER CABLE	1.5	4	12.10	11.00	10.00	38
LOOP FEEDER CABLE	2.5	2	13.42	31.00	26.00	27
LOOP FEEDER CABLE	2.5	4	13.42	28.00	23.00	27
LOOP DETECTOR CABLE	1.5	1	12.10	14.50	20.00	29
LOOP DETECTOR CABLE	2.5	1	18.10	20.00	27.00	18

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.