


Bare Copper Cable Soft Drawn - BS6360/81 - 6mm - 400mm



Non insulated, non sheathed, flexible stranded bare copper cable for use in earthing electrical systems and power distribution networks.

Key Features

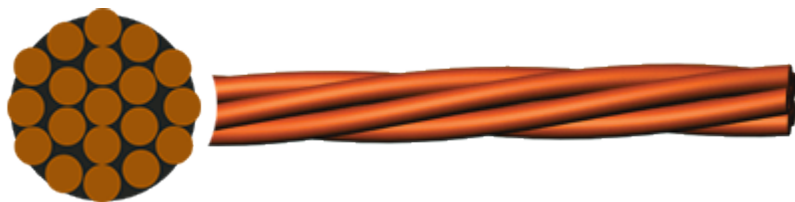

Voltage Rating
450 Volts

Construction

- **Conductor:** Stranded plain annealed compacted circular copper conductor non insulated and non sheathed.

Standards

- IEC 60228
- BS EN 13602
- BS6360/81

Bare Copper Cable Soft Drawn - BS6360/81 - 6mm - 400mm - Dimensions

Reference	Conductor Size (mm ²)	No Of Cores	Stranding(mm)	Overall Diameter(mm)	Weight(Kg/Km)
CB006	6	1	7/1.04	3	58
CB010	10	1	7/1.35	4.2	96
CB016	16	1	7/1.70	5.1	154
CB025	25	1	7/2.14	5.9	240
CB035	35	1	7/2.52	7.8	336
CB050	50	1	19/1.78	8.8	480
CB070	70	1	19/2.14	9.8	672
CB095	95	1	19/2.52	12.5	912
CB120	120	1	37/2.03	12.8	1152
CB150	150	1	37/2.25	14.4	1440
CB185	185	1	37/2.52	16.1	1776
CB240	240	1	61/2.25	19.8	2304
CB300	300	1	61/2.52	20.6	2800
CB400	400	1	61/2.85	26.4	3750

ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.

For more information contact: 01642 241 133

