


CMP Glands CW

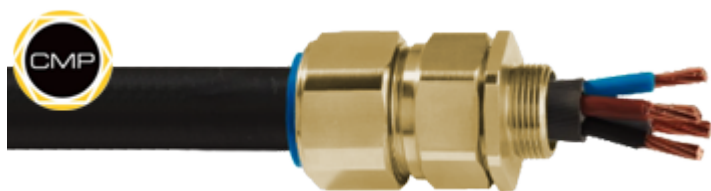

CMP brass indoor and outdoor glands are most commonly used with Steel Wire Armoured cable (SWA). Each cable gland provides mechanical cable retention and electrical continuity via armour wire termination. All CMP cable glands conform to EN50262:1999 and BS6121:Part 1:1989. The brass grade for all glands is CuZn39Pb3 (CW614N) to EN12168.

Key Features

Construction

Standards

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.

For more information contact: **01642 241 133**



CENELEC

