


Defence Standard 61-12 Part 4 Cable

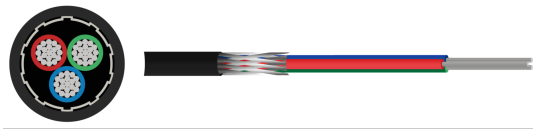

Description

These Multi-Core flexible cables are designed for high density wiring between components within instruments and electronic equipment. They are extensively used in aircraft, process control systems, computers, data processors, military vehicles and military equipment.

Key Features



Voltage Rating

7/0.1mm cores: 250V r.m.s., up to 1.6 kHz
7/0.2mm cores: 440V r.m.s., up to 1.6 kHz



Minimum Bending Radius

7.5 x overall diameter



Temperature Limits

Fixed: -30°C to +70°C
Flexing: -15°C to +70°C

Standards

- Generally to Ministry of Defence Standard DEF 61-12 PVC Part 4 for 7/0.2 conductors
Part 5 for 16/0.2 conductors

Construction

- **Conductor:** Flexible Tinned Copper Conductor
- **Insulation:** Polyvinyl Chloride (PVC)
- **Braiding:** Tinned Copper Wire Braiding (TCWB)
- **Outer Sheath:** Polyvinyl Chloride (PVC)

QA Lab

Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

ecovadis

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.