


# DNO Approved SNE Aluminium Split Concentric Cable - XLPE, PVC - 25mm<sup>2</sup> to 35mm<sup>2</sup>

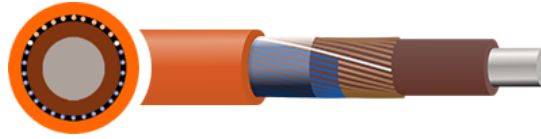

## Description

SNE Aluminium Split Concentric Cable | DNO Approved | XLPE PVC | 25mm<sup>2</sup> to 35mm<sup>2</sup>

## Standards

- BS7870-3-21 for PVC sheath
- BS7870-3-22 for LSZH sheath
- BS EN/IEC 60332-1-2
- BS EN/IEC 60228

## Key Features



**Voltage Rating**  
600/1000 Volts



**Minimum Bending Radius**  
8 x Overall Diameter



**Flame Retardancy**  
BS EN 60332-1-2



**Temperature Limits**  
Temperature Range: -15°C to + 70°C

## Construction

- **Conductor:** Solid Aluminium Conductor
- **Insulation:** Cross Linked polyethylene (XLPE)
- **Bedding:** Available in both Poly Vinyl Chloride (PVC) and Low Smoke Zero Halogen (LSZH)
- **Neutral Conductor:** Plain copper wire covered in blue polymeric compound
- **String Separator:** Non Hygroscopic separator
- **Earth Continuity Conductor:** Plain Copper
- **Separator:** Binding Tape Helically Applied
- **Outer Sheath:** Polyvinyl Chloride (PVC)
- **Sheath Colour:** Black

## QA Lab

### Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



## CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



## Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



## ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

## ecovadis

## DNO Approved SNE Aluminium Split Concentric Cable - XLPE, PVC - 25mm<sup>2</sup> to 35mm<sup>2</sup> - Dimensions

Reference	Conductor Size (mm <sup>2</sup> )	No Of Cores	Nominal Diameter	Max Voltage Rating	Overall Diameter(mm)	Weight(Kg/Km)
25SPLITCONAL	25	1	16	0.6/1KV	16	490
3X25SPLITCONAL	25	3	23.5	0.6/1KV	23.5	830
35SPLITCONAL	35	1	16	0.6/1KV	16	610
3X35SPLITCONAL	35	3	26	0.6/1KV	26	1030

CONCENTRIC CABLE CURRENT CARRYING CAPACITY				
NUMBER OF CORES	NOMINAL CROSS SECTIONAL AREA	CONTINUOUS CURRENT RATING		
		CLIPPED DIRECT	IN CONDUIT ON WALL	IN AIR
	(MM <sup>2</sup> )	AMPS	AMPS	AMPS
1	25	119	105	127
3	25	90	84	97
1	35	147	128	158
3	35	112	103	120

### CONCENTRIC CABLE ELECTRIC CHARACTERISTICS

NOMINAL CROSS SECTIONAL AREA	MAXIMUM DC RESISTANCE OF CONDUCTOR AT 20°C	MAXIMUM AC RESISTANCE OF CONDUCTOR AT 20°C -	MAXIMUM DC RESISTANCE OF CONCENTRIC CONDUCTOR AT 20°C -
(MM <sup>2</sup> )	Ω/KM	Ω/KM	Ω/KM
25	1.2	1.54	1.3
35	0.868	1.11	0.91

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.