


Nexans - NA2XS(FL)H 24kV Power Cable

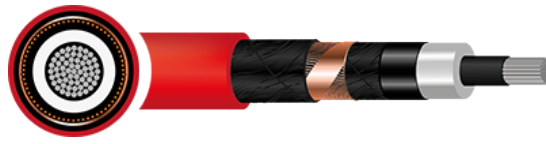

Description

Medium voltage power cables for fixed installations in distribution networks and for connection to process machinery, plant and power generation equipment. Cables from Nexans can be fixed on cable trays, within conduits or fixed to walls. This cable is not suitable for direct burial.

Should not be installed at temperatures below 0°C.

Key Features



Voltage Rating
12/20 (24)kV



Minimum Bending Radius
15 x Overall Diameter



Flame Retardancy
BS EN/IEC 60332-1
BS EN/IEC 60332-3-24



Temperature Limits
Temperature Range: -5°C to +90°C

Standards

- IEC 60502-02
- BS EN/IEC 60332-3-24 (cat C)
- UV Resistant: EN 50396
- IEC/EN 61034-1/2,
- IEC/EN 60754-1/2
- BS EN/IEC 60332-1-2
- BS EN/IEC 60228

Construction

- **Conductor:** Class 2 Stranded Aluminium Conductor
- **Conductor Screen:** Semi-Conductive material
- **Insulation:** Cross Linked polyethylene (XLPE)
- **Insulation Screen:** Semi-conductive material (bonded)
- **Longitudinal Waterblocking:** Semi-conductive swellable tape
- **Metallic Screen:** Copper Wires plus Copper tape
- **Water Blocking:** Radial applied Al/PET Tape
- **Outer Sheath:** Low Smoke Zero Halogen (LSZH)

QA Lab

Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

ecovadis

Nexans - NA2XS(FL)H 24kV Power Cable - Dimensions

Reference	Perm. Current buried / direct 20°C [A]	Perm current rating in air 30°C [A]	Max. DC Resist. Cond. 20°C [Ohm/km]	Conductor Size (mm2)	No Of Cores	Overall Diameter(mm)	Weight(Kg/Km)
22KVNA2XSFLH1X 95	221	338	0.32	95	1	28.8	1020
22KVNA2XSFLH1X 185	317	504	0.164	185	1	33.8	1440
22KVNA2XSFLH1X 240	367	593	-	240	1	90	-
22KVNA2XSFLH1X 630	600	930	-	630	1	-	3380



31196



CENELEC



NA2XS(FL)H – ELECTRICAL CHARACTERISTICS

CONDUCTOR SIZE	NOMINAL ELECTRICAL RESISTANCE AT 20°C	NOMINAL ELECTRICAL RESISTANCE AT 20°C	CURRENT CARRYING CAPACITY		NOMINAL SHORT-CIRCUIT CURRENT FOR 1 SECOND OF CONDUCTOR
			20°C IN GROUND / DUCT	30°C IN OPEN AIR	
MM ²	Ω/KM	Ω/KM	AMPS	AMPS	kA
35	0.868	1.120	145	154	3.29
50	0.641	0.825	195	217	4.70
70	0.443	0.570	237	270	6.58
95	0.320	0.412	282	328	8.93
120	0.253	0.328	320	378	11.28
150	0.206	0.268	353	425	14.10
185	0.164	0.213	396	485	17.39
240	0.125	0.163	457	573	22.56
300	0.100	0.132	511	652	28.20
400	0.0778	0.103	566	740	37.60
500	0.0605	0.081	630	838	47.00
630	0.0469	0.064	701	882	59.22
240	0.0801	0.0801	379	607	0.0801
300	0.0641	0.0641	429	703	0.0641
400	0.0486	0.0486	541	823	0.0486

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.