
SY Control Cable - Flexible - LSZH BS EN 50525-3-11 and VDE 0250 - 1mm² to 16mm²

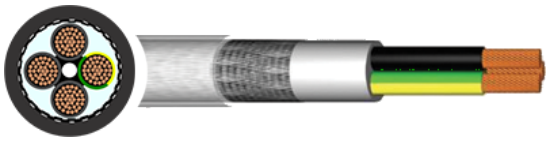

Description

SY control cable is used as a control cable in areas requiring light mechanical protection and areas where there is risk to life from fire, smoke emissions and toxic fumes. The cables are designed to be used as a connecting cable for measuring, control and regulation equipment in assembly, production line and conveyor systems.

Key Features

Voltage Rating
300/500 Volts

Minimum Bending Radius
10 x Overall Diameter

Flame Retardancy
BS EN/IEC 60332-1
BS EN/IEC 60332-3-24

Temperature Limits
Fixed: -20°C to +80°C
Flexing: -5°C to +70°C

Core Colours

3 core and above - Black with White numbers plus Green Yellow

Also available with coloured cores as follows:

3 core - Blue Brown Green Yellow

4 core - Brown Black Grey Green Yellow

Standards

- Generally to BS EN 50525-3-11
- IEC 60332-1
- BS EN/IEC 61034-2
- BS EN/IEC 60228
- BS EN/IEC 60332-3-24
- Generally to VDE 0250

Construction

- **Conductor**: Class 5 flexible, stranded copper
- **Insulation**: LSZH (Low Smoke Zero Halogen)
- **Bedding**: LSZH (Low smoke Zero Halogen)
- **Armour**: Galvanised Steel Wire Braid (GSWB)
- **Outer Sheath**: Low Smoke Zero Halogen (LSZH)
- **Sheath Colour**: Grey

Training & Testing Lab

AN ISO/IEC 17025 ACCREDITED FACILITY

Cleveland Cable Test & Training Lab
Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing.

ISO/IEC 17025 Accredited Testing Laboratory

CPR
Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.

Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.

ecovadis
Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

SY Control Cable - Flexible - LSZH BS EN 50525-3-11 and VDE 0250 - 1mm² to 16mm² - Dimensions

Reference	Conductor Size (mm2)	No Of Cores	Stranding(mm)	Overall Diameter(mm)	Weight(Kg/Km)	Gland Size
SY7X1LSF	1	7	32/0.20	10.1	171	20/16
SY3X1/5LSF	1.5	3	30/0.25	8.6	143	20/16
SY4X1/5LSF	1.5	4	30/0.25	9.3	170	20/16
SY5X1/5LSFCC	1.5	5	30/0.25	10	173	20/16
SY7X1/5LSF	1.5	7	30/0.25	10.7	198	20/16
SY12X1/5LSF	1.5	12	30/0.25	13.8	341	20/16
SY3X2/5LSF	2.5	3	50/0.25	9.9	190	20/16
SY4X2/5LSF	2.5	4	50/0.25	10.8	240	20/16
SY5X2/5LSFCC	2.5	5	50/0.25	11.5	247	20S
SY7X2/5LSF	2.5	7	50/0.25	13.4	327	20S
SY3X4LSFCC	4	3	56/0.30	12.2	323	20S
SY4X4LSFCC	4	4	56/0.30	13.4	354	20S
SY5X4LSFCC	4	5	56/0.3	15	392	20
SY3X6LSF	6	3	84/0.30	13.4	343	20S
SY4X6LSFCC	6	4	84/0.30	14.6	458	20
SY5X6LSFCC	6	5	84/0.30	16.7	572	20
SY4X10LSFCC	10	4	80/0.40	16.3	550	25
SY5X10LSFCC	10	5	80/0.40	21	855	25
SY4X16LSFCC	16	4	126/0.40	19	842	25
SY5X16LSFCC	16	5	126/0.40	25.2	1258	25

Multi core non-armoured 90 °C and 180°C thermosetting insulated flexible cables with sheath Reproduced from BS7671:2018 Wiring Regulations

TABLE 4F2A

CURRENT-CARRYING CAPACITY (Amps)

Ambient temperature: 30 °C
Conductor operating temperature: 90 °C

Conductor cross sectional area	Single-phase AC or DC	Three-phase AC	Single-phase AC or DC
	1 x 2 core cable, with or without protective conductor	1 x 3 core, 4 core or 5 core cable	2 single-core cables, touching
(mm^2)	(A)	(A)	(A)
4	42	37	-
6	55	49	-
10	76	66	-
16	103	89	-
25	136	119	-
35	-	146	200
50	-	177	250
70	-	225	310
95	-	273	369
120	-	316	432
150	-	363	497
185	-	414	564
240	-	487	673
300	-	560	773
400	-	-	924
500	-	-	1062
630	-	-	1242

NOTES:

1 The current ratings tabulated are for cables in free air but may also be used for cables resting on a surface. If the cable is to be wound on a drum on load the ratings should be reduced in accordance with ***NOTE 2*** below and for cables which may be covered, ***NOTE 3 below.***

2 **Flexible cables wound on reeling drums**
The current ratings of cables used on reeling drums are to be reduced by the following factors:

a) Radial type drum
ventilated: 85 %
unventilated: 75 %

b) Ventilated cylindrical type drum
I layer of cable: 85 %
2 layers of cable: 65 %
3 layers of cable: 45 %
4 layers of cable: 35 %

A radial type drum is one where spiral layers of cable are accommodated between closely spaced flanges; if fitted with solid flanges the ratings given above should be reduced and the drum is described as non-ventilated. If the flanges have suitable apertures the drum is described as ventilated.

A ventilated cylindrical cable drum is one where layers of cable are accommodated between widely spaced flanges and the drum and end flanges have suitable ventilating apertures.

3 Where cable may be covered over or coiled up whilst on load, or the air movement over the cable restricted, the current rating should be reduced.

It is not possible to specify the amount of reduction but the table of rating factors for reeling drums can be used as a guide.

4 For 180 °C cables, the rating factors for ambient temperature allow a conductor operating temperature up to 150 °C.
Consult the cable manufacturer for further information.

5 Where it is intended to connect the cables in this table to equipment or accessories designed to operate at a temperature lower than the maximum operating temperature of the cable, the cables should be rated at the maximum operating temperature of the equipment or accessory (see Regulation 512.1.5).

6 Where it is intended to group a cable in this table with other cables, the cable should be rated at the lowest of the maximum operating temperatures of any of the cables in the group (see Regulation 512.1.5).

TABLE 4F2B

VOLTAGE DROP (per ampere per metre):

Conductor operating temperature: 90 °C

Conductor cross-sectional area	Two-core cable or 2 x Single core cables DC	2 core cable, single-phase AC			1 x 3 core, 4 core or 5 core cable, three-phase AC			2 single-core cables, touching Single-phase AC*		
(mm^2)	(mV/Nm)	(mV/Nm)			(mV/Nm)			(mV/Nm)		
4	13.20	13.20			11.10			-		
6	8.50	8.50			7.40			-		
10	5.10	5.10			4.40			-		
16	3.20	3.20			2.70			-		
		r	x	z	r	x	z	r	x	z
25	2.03	2.03	0.175	2.04	1.73	0.150	1.73	-	-	-
35	1.420	-	-	-	1.22	0.150	1.23	1.44	0.21	1.46
50	1.000	-	-	-	0.91	0.145	0.93	1.00	0.21	1.02
70	0.710	-	-	-	0.62	0.140	0.64	0.71	0.20	0.73
95	0.540	-	-	-	0.47	0.135	0.49	0.54	0.195	0.57
120	0.420	-	-	-	0.37	0.135	0.39	0.42	0.190	0.46
150	0.340	-	-	-	0.29	0.130	0.32	0.34	0.190	0.39
185	0.270	-	-	-	0.24	0.130	0.27	0.27	0.190	0.33
240	0.210	-	-	-	0.188	0.130	0.23	0.210	0.185	0.28
300	0.167	-	-	-	0.147	0.125	0.195	0.173	0.180	0.25
400	0.127	-	-	-	-	-	-	0.132	0.175	0.22
500	0.100	-	-	-	-	-	-	0.107	0.170	0.20
630	0.074	-	-	-	-	-	-	0.085	0.170	0.190

NOTES:

1 The voltage drop figures given above are based on a conductor operating temperature of 90 °C and are therefore not accurate when the operating temperature is in excess of 90 C. In the case of the 180 °C cables with a conductor temperature of 150 °C the above resistive values should be increased by a factor of 1.2.

2 *A larger voltage drop will result if the cables are spaced.

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.