


## ENATS 09-6 Telecommunications Cable - SCR, SWA - 0.50mm

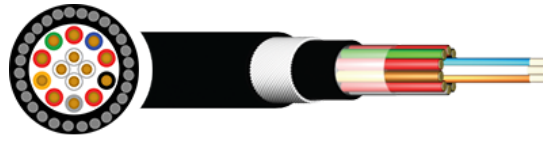

### Description

Telecommunication cable is predominantly used in electrical instrumentation and communications. The cable is manufactured to specification ENATS 09-6 Section 4.5. (Electrical National Association and Technical specification). ENATS is the governing body who cover utilities specification cables.

### Key Features



**Flame Retardancy**  
BS4066 PT1 & IEC 332 PT1



**Temperature Limits**  
Fixed -30°C to +70°C

### Core Colours

\*\*All two pair cables are in quad formation and colour coded in rotation.



For 30 pair cables the formation will be - 3 x 10 pair units numbered - 1, 2 & 3

For 40 pair cables the formation will be - 2 x 20 pair units numbered - 1 & 2

For 50 pair cables the formation will be - 5 x 10 pair units numbered - 1, 2 3, 4 & 5

For 100 pair cables the formation will be - 5 x 20 pair units numbered - 1, 2, 3, 4 &

5

### Standards

### Construction

- **Conductor:** Solid Plain Annealed Copper Conductors
- **Insulation:** Polyvinyl Chloride (PVC)
- **Bedding:** Polyvinyl Chloride (PVC)
- **Screen:** Collective Aluminium/mylar tape with 0.5mm drain wire
- **Armour:** Galvanised Steel Wire Armour (SWA)
- **Sheath:** PVC (Polyvinyl Chloride)
- **Sheath Colour:** Black

### QA Lab

#### Cleveland Cable Test & Training Lab

Our state-of-the-art cable testing facility ensures that every cable meets the highest standards of quality and compliance through continuous, rigorous testing. Where applicable, cables are independently tested and certified by BASEC to ensure full compliance.



### CPR

Cleveland Cable Company is committed to compliance with the Construction Products Regulation (CPR). Where applicable, all cables manufactured after 1st July 2017 have been assessed in accordance with CPR requirements, with full supporting documentation available.



### Our Sustainability Commitment

We are committed to the journey to Net Zero as a business partner, an employer and a community member.

By thinking and acting sustainably, we deliver excellent customer service while reducing carbon emissions in collaboration with our customers and suppliers.



### ecovadis

Cleveland Cable Company has been independently assessed by EcoVadis, a globally recognised provider of business sustainability ratings. Our score places us among the top 35% of companies evaluated worldwide, reflecting our strong commitment to environmental, social, and ethical performance

### ecovadis

## ENATS 09-6 Telecommunications Cable - SCR, SWA - 0.50mm - Dimensions

Reference	Conductor Size (mm <sup>2</sup> )	No Of Pairs	Stranding(mm)	Overall Diameter(mm)	Weight(Kg/Km)	Nylon Cleat Size	Gland Size
13401	0.5	2	1/0.8	10.30	223	0.5	20S
13403	0.5	5	1/0.8	13.74	349	0.6	20S
13404	0.5	10	1/0.8	18.14	599	0.8	20
13405	0.5	15	1/0.8	19.40	795	0.8	20
13406	0.5	20	1/0.8	22.34	900	0.9	25
13407	0.5	25	1/0.8	23.50	1159	1.0	25
13408	0.5	30	1/0.8	25.21	1332	1.0	25
13409	0.5	40	1/0.8	28.00	1435	1.2	32
13410	0.5	50	1/0.8	31.44	1926	1.4	32
13411	0.5	100	1/0.8	44.70	3041	1.8	50S

**ENATS 4.5 - CORE COLOURS**

PAIR NUMBER	WIRE A	WIRE B
1	WHITE	BLUE
2	WHITE	ORANGE
3	WHITE	GREEN
4	WHITE	BROWN
5	WHITE	GREY
6	RED	BLUE
7	RED	ORANGE
8	RED	GREEN
9	RED	BROWN
10	RED	GREY

PAIR NUMBER	WIRE A	WIRE B
10	RED	GREY
11	BLACK	BLUE
12	BLACK	ORANGE
13	BLACK	GREEN
14	BLACK	BROWN
15	BLACK	GREY
16	YELLOW	BLUE
17	YELLOW	ORANGE
18	YELLOW	GREEN
19	YELLOW	BROWN

All two pair cables are in quad formation and colour coded in rotation - White, Red, Blue, Orange.

For 30 pair cables the formation will be 3 X 10 pair units numbered - 1, 2 and 3.

For 40 pair cables the formation will be 2 X 20 pair units numbered - 1 and 2.

For 50 pair cables the formation will be 5 X 10 pair units numbered - 1, 2, 3, 4 and 5.

For 100 pair cables the formation will be 5 X 20 pair units numbered - 1, 2, 3, 4 and 5.

THE INFORMATION CONTAINED WITHIN THIS DATASHEET IS FOR GUIDANCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY. WE BELIEVE THE INFORMATION IS CORRECT AT THE TIME OF PUBLICATION. PLEASE NOTE WHEN SELECTING CABLE ACCESSORIES THAT ACTUAL CABLE DIMENSIONS MAY VARY DUE TO MANUFACTURING TOLERANCES.